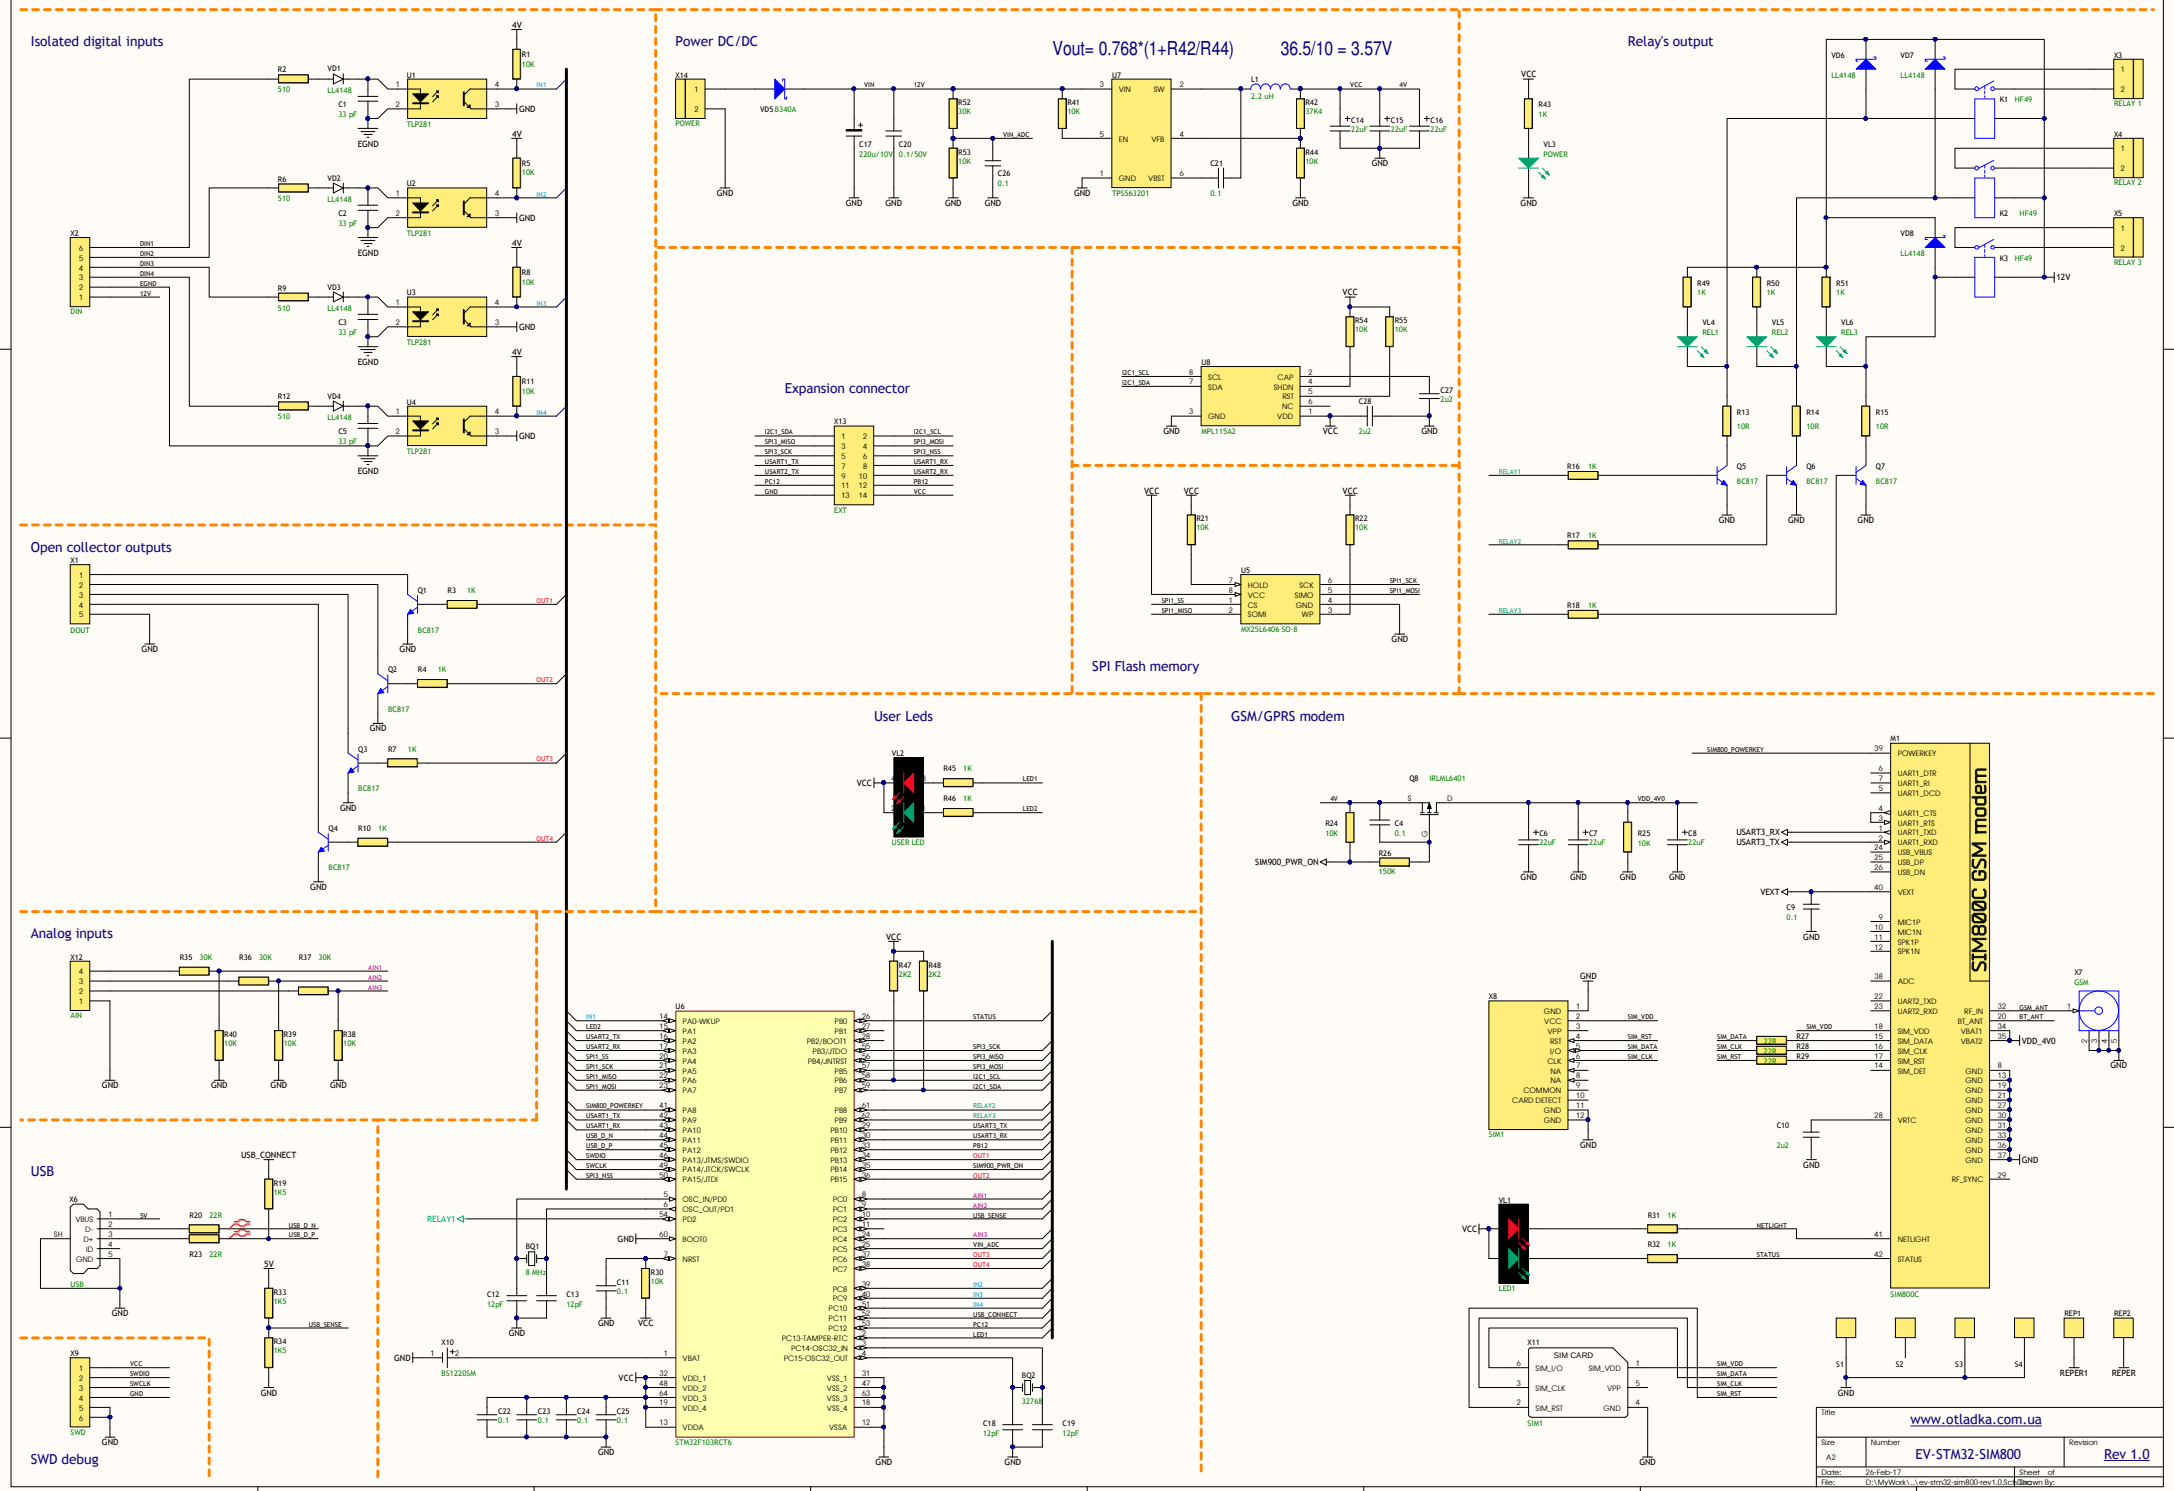
Isolated digital inputs
Power DC/DC
Vout= 0.768*(1+R42/R44)
36.5/10 = 3.57V
Relay's output
Expansion connector
SPI Flash memory
Open collector outputs
User Leds
GSM/GPRS modem
Analog inputs
USB
SWD debug
SIM800C GSM modem
www.otladka.com.ua
EV-STM32-SIM800
Rev 1.0